

TEHNIČKI MOTORI


MicroNX

BL-T&K (50K)

Specifikacije


KONTROLNA KUTIJA

Proizvod	BL-T&K (50K)		
Ulazni napon	110/230V		
Frekvencija	50/60 Hz		
Maksimalna struja	3A		
Iznazni napon	DC 0 - 30V		
Dimenzije (mm)	W:83	D:290	H: 240
Težina	2,9kg		

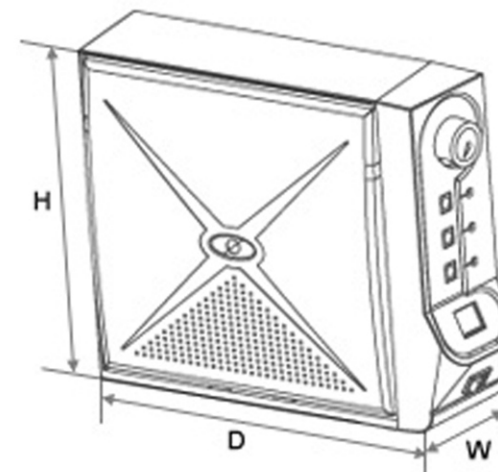


MIKROMOTOR

Proizvod	BL-800B(50K)		
Vrsta:	Bez četkica		
Broj obrtaja bez opterećenja	0o/min - 50.000 o/min		
Obrtni momenat (torque)	6,3 N/cm		
El. Snaga	350 (W)		
Dimenzije (mm)	L: 158 L1: 80 L2: 78 D: 24,7 D1: 17,6		
Težina	200g		

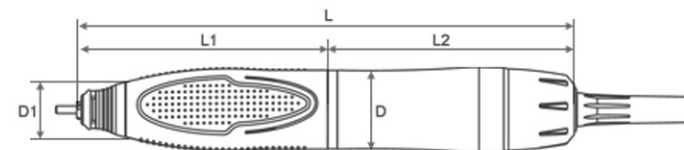

Osnovne odlike 1

Kontrolna kutija

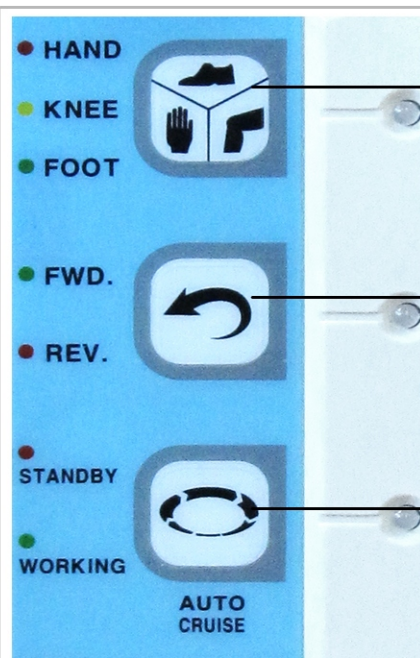

Način rada
(ruka, koljeno, stopalo)

Smjer rotacije

Tempomat
(za rad koljenom, stopalom)



Brzina **0 - 50.000 obr/min**
(Displej za prikaz greške)

Osnovne odlike 2

Mikromotor (ruža)



Ugodnost prijanjanja

Maksimalno 50.000 obr/min
Velikog obrtnog momenta
(Unaprijeđen motor za obradu metala)

Postolje za mikromotor



Nova pedala
Pedala kontrolisana
magnetnim senzorom!









